

---

Energy Management Solutions

Diesel Storage & Dispensing

UK & Ireland

# TruckMaster<sup>®</sup>

## TITAN Diesel Storage and Dispensing Solutions

### Product Guide

Available from 200 – 900 litres



[kingspan.co.uk/diesel](http://kingspan.co.uk/diesel)

  
**Kingspan.**

# Portable Diesel Storage & Dispensing Solutions

Available from 200 – 900 litres

The TruckMaster range has been specifically designed for the safe transportation of diesel fuel. This robust, portable solution offers users the ultimate convenience by allowing them to refuel remotely on-site.

Available from 200 – 900 litres, with a number of specification and dispensing options, the Kingspan TruckMaster range suits a variety of applications including Agricultural, Construction and Forestry. Built from high-quality polyethylene all tanks are resistant to structural damage, changing weather conditions and UV radiation.

Specifically designed for refuelling remotely on-site, these portable tanks are approved

and tested to meet the needs of the European Agreement (ADR) for the international Carriage of Dangerous Goods by Road\*.


The TruckMaster range offers a quality, cost saving and compliant solution backed by excellent technical and customer service support.

**NEW Metal Hinge Technology**

## TITAN TruckMaster®



### Features and Benefits

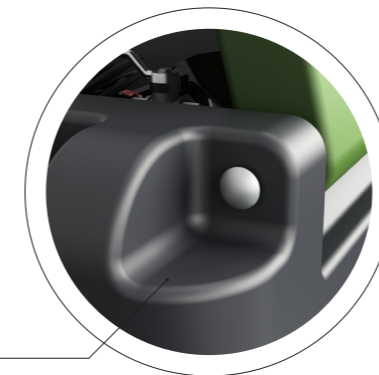

### Environmental Protection

With TruckMaster, on-site safety is assured as diesel can be transported without the requirement of heavy steel drums or jerry cans, which are liable to spill. All dispensing equipment is stored in a secure leak proof area, eliminating the risk of dripping fuel often encountered by an external retrofitted nozzle and hose.



### Easy to Lift

The portable tanks can be easily lifted with its specifically designed lifting eyes or by using a forklift.

### Efficient Transportation

The 430 and 900 litre models feature an internal baffle wall minimising the movement of liquid hence making the truck and the load more stable when in transit.



### Cost-saving Transportation

The compact 200 and 300 litre models occupy only half a Euro Pallet for more economical distribution and reduced delivery costs. 6 TM200 or 4 TM300 models can be stacked on one pallet.

### Power and Safeguard your Business

- > Over 40 years' experience  
Trust and reliability
- > 5 Year Guarantee\*\*  
Total peace of mind
- > Industry Leading ADR\* Approved
- > Quality Assured  
Certified to ISO 9001:2008, ISO 14001:2004, BS OHSAS 18001:2007
- > Secure Lockable Lid  
All equipment is stored under the lockable lid\*\*\*

### TM430/300 Equipment Specification

1. Tank
2. 12V Pump
3. Automatic nozzle (with optional flowmeter, if required)
4. Pressure relief vent
5. Delivery hose
6. Lockable lid\*\*\*
7. Shackles†
8. 4" Inspection lid††
9. Filling offset†††
10. Internal LED Light†††
11. Gas Strut



### Model Selector

All dimensions and weights are an approximate only

\* 200 and 300 litre models do not require ADR approval due to their smaller capacity

\*\* One year on equipment

\*\*\* Lid with integrated lock (TM430 and TM900). Lid with lockable latch, padlock not provided (TM200 and TM300)

† Available on TM430 and TM900 as optional extra

†† Available on TM200, TM300

††† Available on TM430 and TM900 as optional extra

#### TM200



Capacity (nominal)	200 litres
Length	600 mm
Width	800 mm
Height	620 mm
Weight	33 kg

#### TM300



Capacity (nominal)	300 litres
Length	600 mm
Width	800 mm
Height	890 mm
Weight	45 kg

#### TM430



Capacity (nominal)	430 litres
Length	1180 mm
Width	860 mm
Height	910 mm
Weight	64 kg

#### TM900



Capacity (nominal)	900 litres
Length	1140 mm
Width	1050 mm
Height	1210mm
Weight	97 kg

## Specification Options

## TITAN **TruckMaster**<sup>®</sup>

DESCRIPTION / CAPACITY	TM200	TM300	TM430	TM900
Level gauge			•	•
Ball valve on suction line			•	•
Suction line with mesh filter	•	•	•	•
12 V DC pump (max. flow rate 50 l/min)	•	•	•	•
6 m power cable with battery clamps	•	•	•	•
4 m flexible delivery hose			•	•
3,7 m flexible delivery hose	•	•		
Automatic nozzle	•	•	•	•
Lid with integrated lock			•	•
Lid with lockable latch (padlock not provided)	•	•		
Vacuum and pressure relief valve (VENT)	•	•	•	•
Lid with support gas struts			•	•
4 lifting shackles			○	○
Battery powered LED lamp			○	○
24 V DC pump (max. flow rate 50 L/min)	○	○	○	○
Digital flowmeter fixed to the nozzle	○	○	○	○

● Standard accessories ○ Optional accessories



### Head Office

#### Kingspan Water & Energy Ltd

180 Gilford Road, Portadown,  
Co. Armagh, BT63 5LF  
United Kingdom  
T: +44 (0) 28 3836 4444  
F: +44 (0) 28 3836 4445  
E: tankinfo@kingspan.co.uk

### Ireland Office

#### Kingspan Water & Energy Ltd

Dundalk Road  
Carrickmacross  
Co. Monaghan  
T: +353 (0) 42 969 0022  
F: +353 (0) 42 969 0030  
E: tankinfo@kingspan.ie